


MIN ZOOM

Beam opening

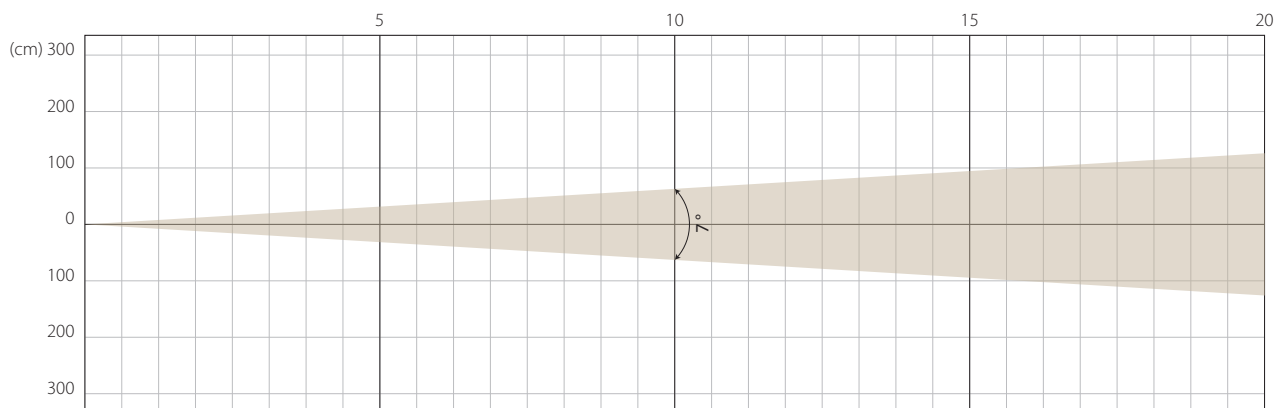


Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	39160	0,62	9474	1,26	4248	1,89	2380	2,52

MIDDLE ZOOM

Beam opening

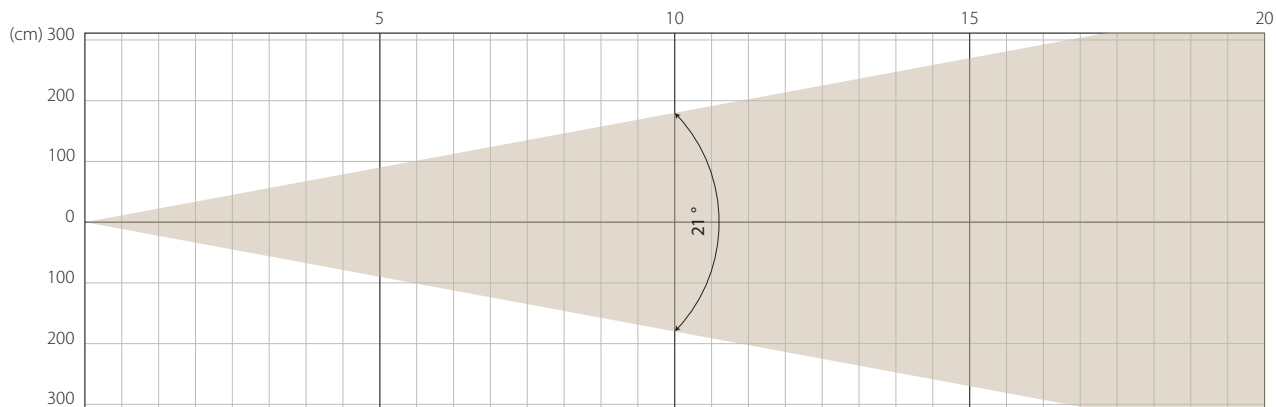


Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	14000	1,83	3619	3,6	1300	5,33	600	7,2

MAX ZOOM

Beam opening

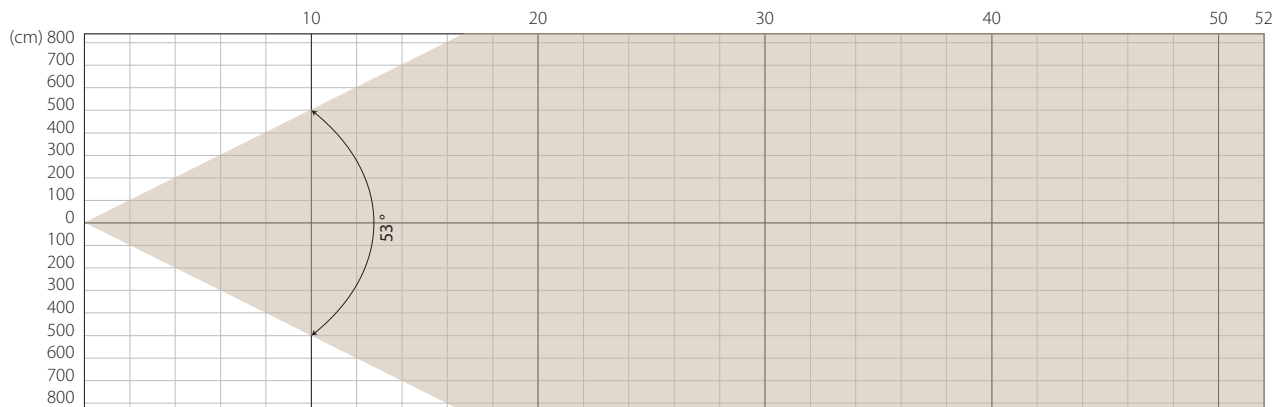

Intensity

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	1188	4,99	350	9,98	169	14,97	98	19,96



Total Flux	19413 lm (@zoom 90)
-------------------	---------------------

CCT @LED engin	8000 (±500K)
CCT @open	7029 (±500K)
Ra @open	71 (Ra≥70)
TLCI	47
TM-30	TBA

Fan Mode	Noise Level (dBA)	Flux (lm)
Auto Mode	44,9	19413
Silence Mode	39,9	14505
Stage Mode	47,3	19502
Studio Mode	42,9	17368

Note: noise messured @1m distance, static status, ambient 31 dBA.

Voltage / Power	100-240V, 50-60HZ	550W
Fixture Dimension / Weight	364.9x210.6x591.6mm	22Kg
Packing Dimension / Weight	44.5x29.5x77cm	30.5Kg