


**MIN ZOOM**

**Beam opening**

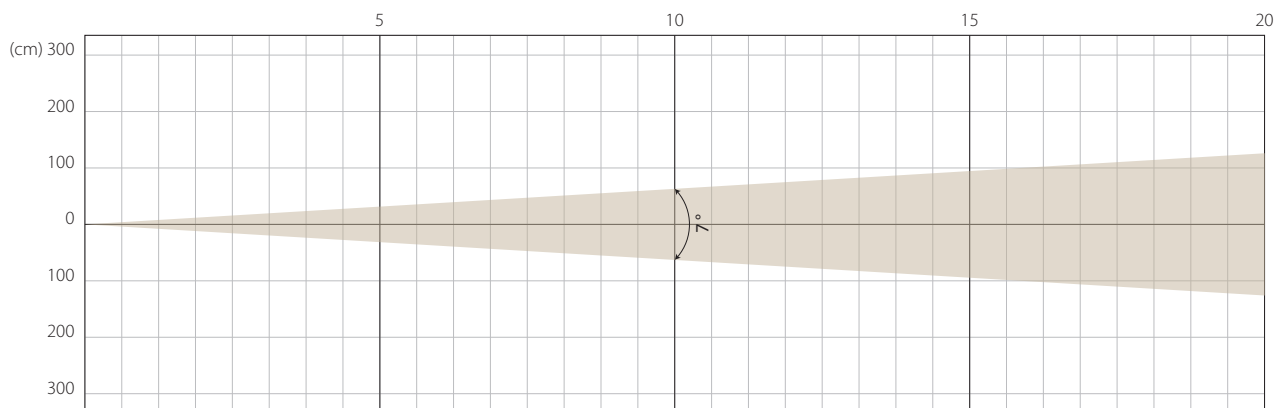


**Intensity**

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	52696	0,62	11720	1,22	5205	1,83	2929	2,44

**MIDDLE ZOOM**

**Beam opening**

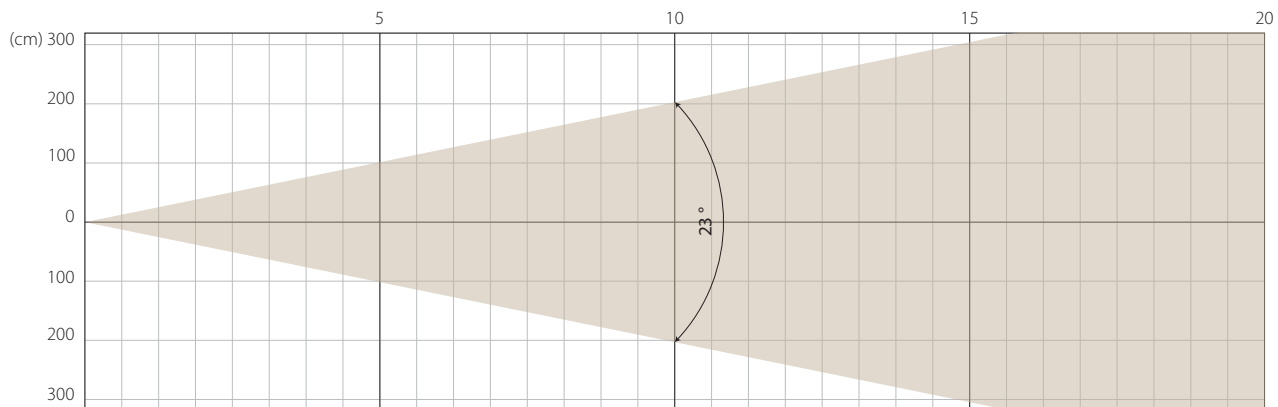


**Intensity**

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	9991	2,03	2488	4,06	1122	6,09	628	8,12

**MAX ZOOM**

**Beam opening**

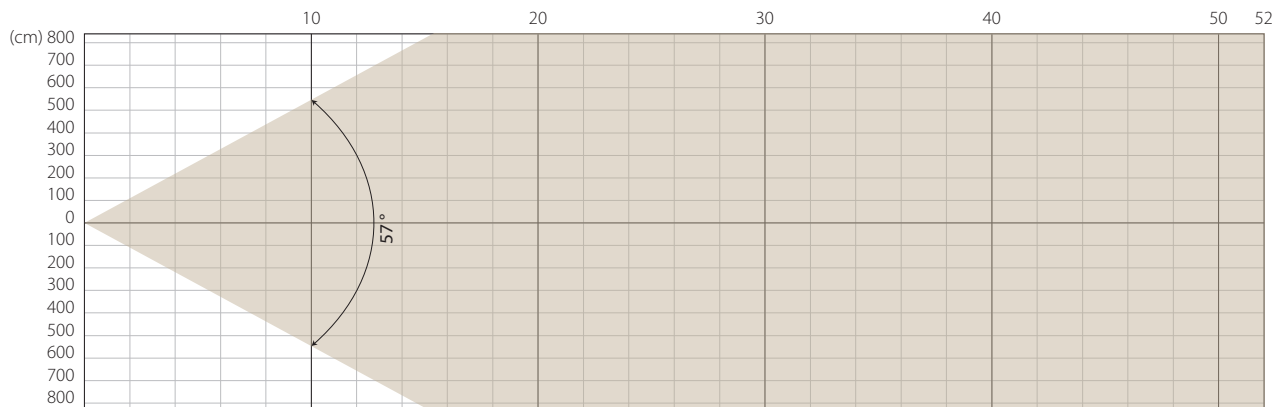

**Intensity**

Distance (m)	5		10		15		20	
unit	lux	diameter	lux	diameter	lux	diameter	lux	diameter
White	1858	5,43	551	10,86	266	16,29	151	21,72



<b>Total Flux</b>	30468 lm (@zoom 90)
<b>CCT @LED engin</b>	7000 (±450K)
<b>CCT @open</b>	6076 (±450K)
<b>Ra @open</b>	90 (±2)
<b>TLCI</b>	86
<b>TM-30</b>	Rf: 84, Rg: 93

<b>Fan Mode</b>	<b>Noise Level (dBA)</b>	<b>Flux (lm)</b>
<b>Auto Mode</b>	45,4	30468
<b>Silence Mode</b>	38,9	21651
<b>Stage Mode</b>	50,2	30962
<b>Studio Mode</b>	39,8	25348

Note: noise measured @1m distance, static status, ambient 31 dBA.

<b>Voltage / Power</b>	100-240V, 50-60HZ	1150W
<b>Fixture Dimension / Weight</b>	493.9x280x777.9mm	40Kg
<b>Packing Dimension / Weight</b>	67x57x69.5cm	57Kg